



Punches 'in Reverse'

- Sharp Faced Characters
- Negative, reverse impression - for use in forging or moulding applications, to produce a positive or readable inscription on a moulded or cast component





Available in singles, Sets of 27 Characters (A-Z,&) and Sets of 10 (0-9) in the following sizes:

Size Range							
CHARACTER SIZE		BLANK SIZE					
		A		B		C	
Metric	Imperial	Metric	Imperial	Metric	Imperial	Metric	Imperial
1.50mm	1/16"	63.50mm	2.1/2"	6.35mm	1/4"	6.35mm	1/4"
2.00mm	5/64"	63.50mm	2.1/2"	6.35mm	1/4"	6.35mm	1/4"
3.00mm	1/8"	63.50mm	2.1/2"	6.35mm	1/4"	6.35mm	1/4"
4.00mm	5/32"	70.00mm	2.3/4"	9.50mm	3/8"	9.50mm	3/8"
5.00mm	3/16"	70.00mm	2.3/4"	9.50mm	3/8"	9.50mm	3/8"
6.00mm	1/4"	70.00mm	2.3/4"	9.50mm	3/8"	9.50mm	3/8"

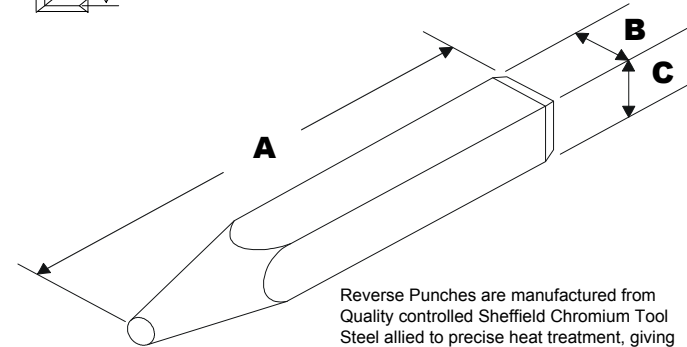

Reverse Punches are manufactured from Quality controlled Sheffield Chromium Tool Steel allied to precise heat treatment, giving a hardness of 58-62RC. at the character and 32-40 R.C. at the striking end

SHARP FACED IMPRESSION

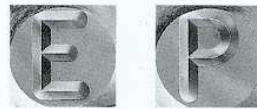

Visual of Reverse Character

The character appears positive to indent a negative impression



Reverse Punches are manufactured to quality system ISO 9001:2000

Edward Pryor & Son Ltd. Egerton Street Sheffield England
 Tel: (+44) 114 276 6044 Fax : (+44) 114 276 6890
 email : enquiries@pryormarking.com website : www.pryormarking.com